

Schlage Control,™ LE, and NDE wireless locks





Schlage® Control, LE, and NDE electronic locks

Connect and control more doors.

A whole lot easier than ever before with Schlage wireless locks.



Schlage ND Cylindrical

- + Electronic Features
- = Schlage NDE



Schlage L Mortise

- + Electronic Features
- = Schlage LE



Schlage B Deadbolt

- + Electronic Features
- = Schlage Control™ Smart Locks

Value proposition



Reduce the time and costs associated with managing keys due to frequent turnover



Mitigate risks associated with lost or stolen keys, provides a detailed audit of events



Enhance security with more visibility and control



Increase satisfaction by enabling convenient access to shared spaces



Increase efficiency by enabling updates to occur from virtually anywhere




Integrates seamlessly into existing EAC systems¹

¹ Requires Alliance member software; consult your Allegion rep for details

Popular applications

- Ideal for new construction and retrofit openings
- Indoor/Outdoor rated for perimeter applications



- Suite entries
- Offices
- IT Rooms
- Equipment rooms
- Conference rooms
- Shared restrooms



- Multi-family
- Student housing
- Senior living
- Military housing

- Common areas
- Amenities
- Storage areas
- Shared spaces



- Residence halls
- Classrooms
- Laboratories
- Administrative offices
- Records rooms



Note: images placed for visual reference; NDE and LE can be interchanged for most applications

Schlage NDE Features

- Suites with Schlage ND Series mechanical and wired electrified options
- Fits standard 161L cylindrical prep
- Installs in minutes with just a Phillips screwdriver
- Weather-resistant design for perimeter applications
- Functions:
 - Storeroom function with Vandlgard®
- 3 popular lever styles
- 9 finishes
- Lever handing is field reversible in seconds, no tools required
- Certifications:
 - ANSI/BHMA A156.25 (Indoor/Outdoor)
 - ANSI/BHMA Grade 1
 - UL 10C (3-hour fire rated), UL294, FCC Part 15, ADA, RoHS, Industry Canada





Schlage LE features

- Suites with Schlage L Series mechanical and wired electrified options
- Fits standard mortise prep
- Installs in minutes with just a Phillips screwdriver
- Weather resistant design for perimeter applications
- Chassis Type/Functions:
- MS with LED Indicator for Storeroom
- MB with Interior Push Button & LED for Privacy, Office, Apartment
- MD with Deadbolt & LED for Privacy & Apartment
- 28 popular lever styles and 2 knobs
- 9 finishes
- Certifications:
 - ANSI/BHMA A156.25 (Indoor/Outdoor)
 - ANSI/BHMA A156.13 Grade 1
 - UL 10C (3-hour fire rated), UL294, ULC S319
 - FCC Part 15, IC RSS-210
 - ADA ICC ANSI A117.1
 - RoHS






Greenwich



Addison

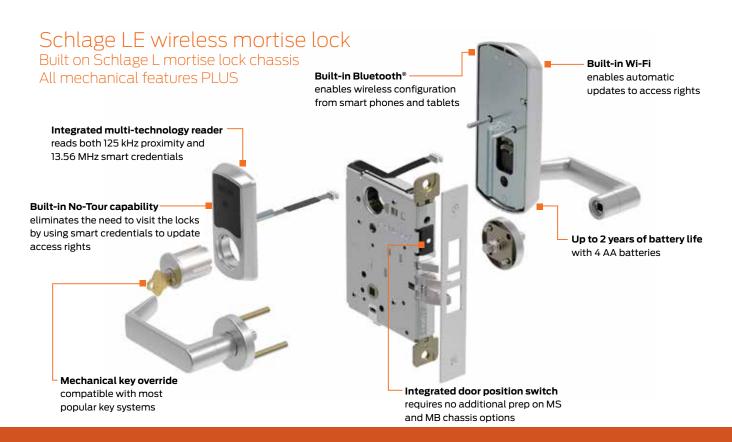

Schlage Control[™] features

- Options include Schlage Control™ Deadbolt and Interconnected lock
- Keyless, no cylinder design bump and pick proof
- Fits standard door prep
- 13 lever designs
- 5 finish options
- Certifications:
 - 90-minute UL listed A 156.12 Grade 2 ANSI/BHMA certified

 Use MT20W wireless enrollment reader to enroll credentials for No-Tour solution





Deadbolt with Addison Trim



Deadbolt with Greenwich Trim










Interconnect Lock with Greenwich Trim

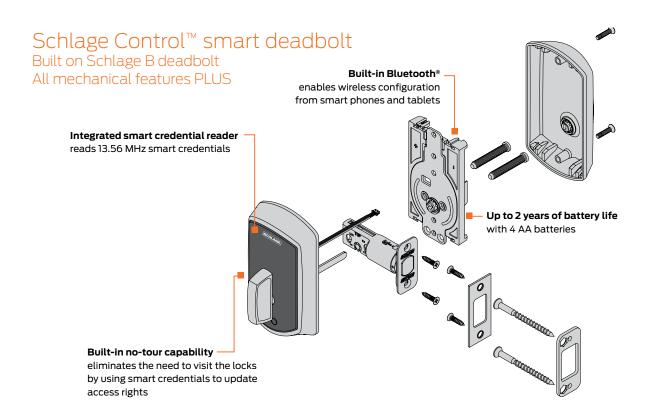

Levers

NDE

The NDE is available in 3 popular lever designs.

Popular levers that are similar across Schlage Control, LE, and NDE



Athens

Sparta

Rhodes

LE

The LE is available in 28 levers, including most M decorative lever options, and 2 knob designs.







Jupiter

Neptune

06

Schlage Control™

Schlage Control™ is available with 13 lever options with matching rose designs for both Addison and Greenwich trims.







Saturn



See Schlage Lever Suiting Guide for more details.

Finishes

See Schlage Lever Suiting Guide for more details

Control				•	•	•	•		■ (716)
LE		•							■(643e)
NDE		•							■(643e)
US number	US3	US4	US10	US15	US19	US26	US26D	US26D	US11
ANSI/BHMA number	605	606	612	619	622	625	626	626AM	643e/716
Color	Bright brass	Satin brass	Satin bronze	Satin nickel	Matte black	Bright chrome	Satin chrome	Satin chrome with anti-microbial	Aged bronze
Finish options	6	-	0		0	6	1	6	6

Cylinders - applicable on NDE and LE only

NDE				LE
	PD	With Cylinder 5- or 6-pin Schlage Everest 29 S123 (standard)	Р	1-1/4" to 1-1/2" cylinder lengths support 1-3/4" door thickness 1.3 (Other 1.5 (Off pulsed to 1.5 (
	ZD	With Cylinder 7-pin Schlage Everest SL¹	Z	1-3/8" to 1-5/8" cylinder lengths support 2" door thickness 1-1/2" to 1-3/4" cylinder
	LD	Less Standard Cylinder	L ²	lengths support 2-1/4" door thickness
	RD	With Cylinder 6-pin FSIC Schlage Everest 29 S123 (standard)	R	Requires 1-1/2" cylinder length - works on all door thicknesses supported by
	סנ	Less Cylinder 6-pin FSIC	J	LE (1-3/4" to 2-1/4")
(Salutor)	GD	With Cylinder 7-pin SFIC Schlage Everest 29 R (standard)¹	GD	Requires 1-3/8" length - supports 1-3/4" to 2" door thicknesses
	BD	Less Cylinder 6- or 7-pin SFIC	BD	(SCOLARII)

 $\label{lem:conditional} \mbox{ Additional options available, please refer to Price Book for details}$

NDE: LD SAR, JD SAR, JD CO6 and JD YA6

LE: T construction core, HD construction core and BDC disposable core

- 1. Factory master keyed only.
- 2. LE cylinder length must be at least 1-1/4". If retrofit application, please confirm existing cylinder length meets LE requirement.

Credentials

There are many similarities between levels of security in keyways and credentials; choose the best fit for the application.

Similar security leve	ls		
	Key	Electronic credential	Applications for electronic credentials
High security	Primus® XP restricted keyway	Smart card - MIFARE DESFire EV1™	 New or existing installations
	Highest level of keyway security	 Most secure card available 	 Applications beyond access control
	 Cannot be duplicated without manufacturer's authorization 	 Advanced data encryption makes duplication nearly impossible 	including vending, parking, secure printing, and more
Restricted	Everest 29™ restricted keyway	Smart card - MIFARE® Clasic	 Existing installations
	High level of security	 Secure encrypted data 	 Migration to MIFARE DESFire EV1[™] is
	 Difficult to make unauthorized 	 More difficult to duplicate 	recommended
	copies		 Appliaitons beyond access control including vending, parking, secure printing, and more
Open	Classic keyway	Proximity card	Proximity card (NDE & LE only)
	 Most common keyway 	 Most common credential type 	 Existing installations
	 No restrictions on duplication 	 Easily duplicated 	 Migration to smart technology is recommended

Note: Schlage Control is compatible with Smart credentials only.

Credentials cross reference

Schlage NDE & LE locks work with proximity and smart credentials; Schlage Control with smart credentials only

Allegion	HID®
7410 Proximity Card Clamshell	1326
7510 Proximity Card ISO Glossy White	1386
7610 Proximity Keyfob	1346
7010 Proximity PVC Sticky Disk	7010
9420 MIFARE® Smart Card Clamshell	2080
9520 MIFARE® Smart Card ISO Glossy White	2000
9651 MiFare® Keyfob	1434



ENGAGE Apps with Schlage® Control™ LE, and NDE

Manage site from anywhere with ENGAGE™ cloud-based web and mobile applications

- Configure lock settings
- Add new users and enroll credentials
- Manage users and assign access privileges
- New! Set lock schedules, holidays, user schedules
- View & export audits and alerts
- Invite others to assist with administration







allegionengage.com

Immediate updates









✓ NDE **√**IF ✓ Control

Send updates at the lock, anytime, with the ENGAGE mobile app.

Automatic daily updates







☑ NDE **√**IF □ Control

Connect locks to the Wi-Fi network for automatic daily updates.

No-Tour via smart credentials







☑ NDE ៧ I F ✓ Control

Use smart credentials to update access rights to the lock.

¹ Requires MT20W enrollment reader

ENGAGE™ cloud-based web and mobile apps

Easy, turn-key solution for multi-family, mixed-use, and commercial properties.

Capabilities	NDE and LE	Control™	
Number of sites	One	One	
Number of locks	Up to 100	Up to 100	
Number of users	Up to 5,000¹	Up to 5,000¹	
Number of audits (lock history & alerts)	Up to 100,000²	Up to 100,000²	
Assign 24/7 access	Yes	Yes	
Assign user schedules	Up to 16	Up to 16	
Assign lock & unlock schedules	Up to 16	N/A	
Assign holiday schedules	Up to 32	N/A	





^{1.} ENGAGE can manage up to 5,000 users. Each NDE and LE lock can manage up to 5,000 users and each Control lock can manage up to 500 users.

See ENGAGE web and mobile app datasheet for complete details.


New!

New!

New!

 $^{2.\,}ENGAGE\,can\,hold\,up\,to\,100,\!000\,audits.\,Each\,NDE\,and\,LE\,lock\,can\,hold\,2,\!000\,and\,each\,Control\,lock\,can\,hold\,1,\!000.$

ENGAGE[™] web and mobile apps make it easy to manage users and locks, from anywhere

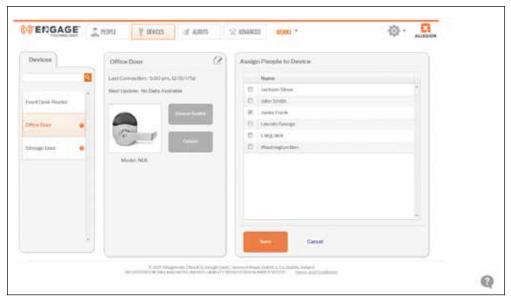

Example: assigning user access to a door with the ENGAGE web app

Example: managing lock settings/adding new locks with ENGAGE mobile app



Android device

iOS device

For solutions requiring real time updates, or applications beyond cylindrical and mortise, please contact Allegion at 866.963.3924 or visit us.allegion.com/alliances