

ENVIRONMENTAL PRODUCT DECLARATION

FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS



Fireframes® Curtainwall Series Fire-rated Frames

This EPD was created using a UL-verified EPD generator for Allegion's full product portfolio. For additional product specific EPDs, please contact Allegion at sustainability@allegion.com.



Since 1980, Technical Glass Products (TGP) has been supplying innovative solutions for specialized glazing needs. TGP is the recognized leader in the fire-rated glass and framing field, working closely with design professionals, building code officials and manufacturers to identify glass and framing solutions for the wide-ranging requirements of today's commercial buildings.

As a member of Allegion, TGP recognizes the value of the Leadership in Energy and Environmental Design (LEED) rating system to building environmentally safe and sustainable structures. By using Life Cycle Assessment and Environmental Product Declarations, we aim to provide our customers with the information they need to make decisions regarding their own sustainable building concepts and green solutions.



ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame
with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025,
EN 15804, and ISO21930:2017

| | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------|
| PROGRAM OPERATOR | UL Solutions | www.spot.ul.com |
| GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER | Program Operator Rules v 2.7 2022 | |
| MANUFACTURER NAME AND ADDRESS | Technical Glass Products Frame: 8107 Bracken PI SE, Snoqualmie, WA 98065 Glass: 7460 Ponderosa Rd, Perrysburg, OH 43551 | |
| DECLARATION NUMBER | 4789828313.130.2 (Updated 12.2025) | |
| DECLARED PRODUCT & DECLARED UNIT | 1 square meter of installed curtainwall | |
| REFERENCE PCR AND VERSION NUMBER | UL PCR Part A - Version 3.2 IBU PCR Part B Curtain walling v1.6 | |
| DESCRIPTION OF PRODUCT'S INTENDED APPLICATION AND USE | Installed to provide fire-rated interior or exterior covering of a building | |
| PRODUCT RSL DESCRIPTION | N/A | |
| MARKETS OF APPLIABILITY | North America | |
| DATE OF ISSUE | March 1, 2023 | |
| PERIOD OF VALIDITY | 5 Years | |
| EPD TYPE | Product-specific | |
| EPD SCOPE | Cradle-to-gate with Options | |
| YEAR OF REPORTED MANUFACTURER PRIMARY DATA | 2021 | |
| LCA SOFTWARE & VERSION NUMBER | GaBi ts Version 10.6.1.135 | |
| LCI DATABASE & VERSION NUMBER | GaBi Content Version 2022.1 | |
| LCIA METHODOLOGY & VERSION NUMBER | CML 2001-Jan 2016 and TRACI 2.1 | |
| The sub-category PCR review was conducted by: | Institut Bauen and Umwelt e.V. (IBU) | |
| | PCR Review Panel | |
| | Info@ibu-epd.com | |
| This declaration was independently verified in accordance with ISO 14025:2006. The UL Environment "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report," v3.2 (Dec 2018), based on ISO 21930:2017, serves as the core PR, with additional considerations from CEN Norm EN 15804 (2013) and the USGBC/UL Environment Part A Enhancement (2017) <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL |  Cooper McCollum, UL Environment | |
| | This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by: WAP Sustainability Consulting | |
| This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by: | James Melville, Thrive ESG | |
| LIMITATIONS Environmental declarations from different programs (ISO 14025) may not be comparable. Comparison of the environmental performance of products using EPD information shall be based on the product's use and impacts at the building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under this PCR. Full conformance with this PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible". Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared. | | |

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025, EN 15804 and ISO 21930:2017

1. Product Definition and Information

1.1. Description of Company

Allegion Plc is a publicly traded global company that manufactures security door products.

More than 25 global brands included under the Allegion parent company umbrella are sold in 120 different countries. Among these brands are TGP (fire-rated glass and framing), Schlage (locks), Von Duprin (exit devices), Ives (hinges, stops and miscellaneous builders' hardware), Falcon (locks, exit devices and closers), Glynn Johnson (holders/ stops), and Steelcraft (steel door and frames).

Allegion operates plants across the United States and internationally.

1.2. Product Description

The Fireframes® Curtainwall Series allows for large, multi-story expanses of glass using narrow steel profiles and Pilkington Pyrostop® fire-resistive-rated glass, composed of Pilkington Optiwhite™ glass and clear intumescent interlayers. An alternative to solid walls, the fire-rated curtain wall system provides clear sightlines while blocking the spread of flames and protecting against the transfer of radiant and conductive heat transfer. Suitable for interior and exterior applications. The product is field-erected.

This EPD covers the Fireframes® Curtainwall Series frame system installed with Pilkington Pyrostop® monolithic glass with the following glass configurations 60-101, 60-201, 60-201-TI, 60-201 BR L1, 60-201 TI BR L1, 120-202, 60-500, or 90-102.

Note that all tables throughout this report for Pilkington Pyrostop® monolithic glass 60-201, including results, also represent 60-201 TI, 60-201 BR L1, 60-201 TI BR L1. All tables throughout this report for Pilkington Pyrostop® monolithic glass 120-202, including results, also represent 60-500 and 90-102. The impacts for the products listed above are within the $\pm 10\%$ threshold of the impacts of the representative product modeled for the EPD.



Figure 1: Fireframes® Curtainwall Series Frame
©Denmarsh Photography

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025, EN 15804 and ISO 21930:2017

1.3. Application

Fireframes® Curtainwall Series by Technical Glass Products can be used in commercial interior and exterior applications.

1.4. Technical Data

Table 1: Technical Data

| TEST* | RESULT | UNIT | STANDARD |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------------------------|
| Driving Rain Impermeability | No leakage after 1 cycle of 15 minutes at 30 psf. No leakage after 4 cycles of 5 minutes at 30 psf. | - | ASTM E547-00 ASTM E331-00 |
| Air Permeability | 0.68 at 1.57 psf; 0.41 at 6.24 psf | ft3/min | ASTM E283-04 |
| Fire Resistances | 60 (specific to glass options) 120 (specific to glass options) | minutes | ANSI/UL 263 CAN/ULC-S101 |
| Uniform Load Deflection at Design Pressure | No damage after positive 40.0 psf. No damage after negative 40.0 psf. Maximum Measured Deflection Positive = 0.291 inches. Maximum Measured Deflection Negative = 0.285 inches. Maximum Measured Permanent Set = 0.014 inches. | - | ASTM E330-02 |
| Direct Airborne Sound Insulation | 41 (60-101) 44 (60-201) 44 (120-202) | dB | EN ISO 140-3 |
| Total Energy Transmittance G | 76 (Pilkington Pyrostop® 60-101 Monolithic Glass) No testing data available for Pilkington Pyrostop® 60-201 Monolithic Glass 69 (120-202) | % | EN 410 |
| Light Transmission Level Rv | 87 (60-101) 86 (60-201) 83 (120-202) | % | EN 410 |

*Other properties are not tested for the product systems.



ENVIRONMENTAL PRODUCT DECLARATION




Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025, EN 15804 and ISO 21930:2017

1.5. Declaration of Methodological Framework

This EPD is cradle-to-gate with options, as represented by the flow diagram below. A summary of the life cycle stages can be found in Table 4. The cut-off criteria are described in Cut-off Rules, and the allocation procedures are described in the Allocation section. No known flows are deliberately excluded from this EPD. Third party verified ISO 14040/44 secondary LCI data sets contribute more than 67% of total impacts in all impact categories required by the PCR.

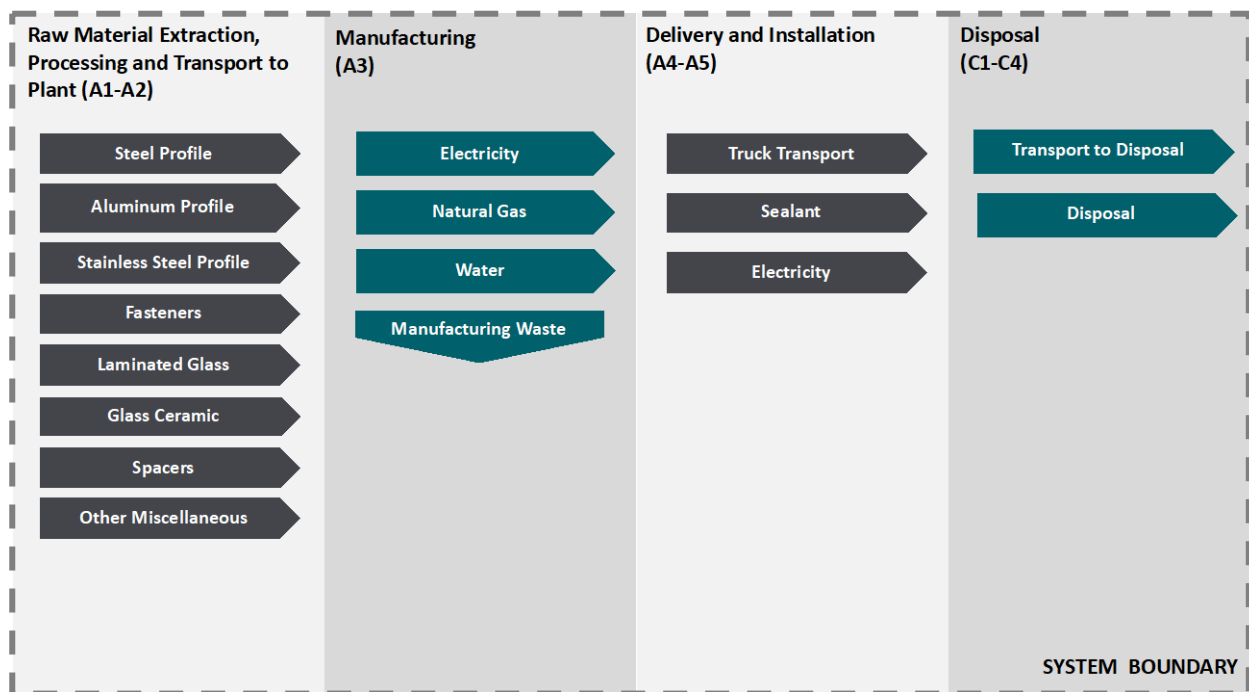

1.6. Material Composition

The materials that make up the declared product system are indicated in Table 2.



ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025, EN 15804 and ISO 21930:2017

Table 2: Material Composition

| MATERIAL | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-101 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-201 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 120-202 |
|-------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Aluminum | 0.99% | 0.87% | 0.7% |
| Steel | 23.56% | 20.81% | 15.7% |
| Nylon 6 | 0.20% | 0.17% | 0.1% |
| Stainless Steel | 3.45% | 3.04% | 2.3% |
| Powder Coating | 0.54% | 0.47% | 0.4% |
| Silicone Compound | 0.75% | 0.66% | 0.5% |
| EPDM | 0.56% | 0.50% | 0.4% |
| Laminated Glass | 69.91% | 73.44% | 80% |
| Calcium Silicate | 0.01% | 0.01% | 0.1% |
| Wood | 0.03% | 0.03% | 0.1% |

1.7. Properties of Declared Product as Delivered

Fireframes® Curtainwall Series by Technical Glass Products is shipped from two manufacturing facilities to the project site and is field-erected.

1.8. Manufacturing

The metal frames of Fireframes® Curtainwall Series product system are manufactured at TGP’s Snoqualmie, WA facility, and the glass components are manufactured at the Perrysburg, OH facility. Raw materials are mined and processed by the supply chain and partly by TGP. Manufacturing begins at receiving bays where the sub-components are delivered. These components are then cut, finished, and shipped to the site for installation. For some components whose manufacturing process could not be determined, stamping was used as a default due to its versatility to form various types of components.

Energy resources used in the manufacturing process include electricity, natural gas and water. Manufacturing waste is also generated throughout each step as the products are formed and assembled. All waste is either landfilled or recycled.

1.9. Packaging

Components of product systems are separately shipped and the system is field-erected. There is virtually no primary packaging material used and secondary packaging materials are reused.

1.10. Transportation



ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025,
EN 15804 and ISO 21930:2017

It is assumed that all raw materials are distributed by truck and ship, based on global region. An average distance using this information was calculated and used in the model.

The transport distance to the end customers was calculated based on sales data for the year 2021. The transportation distance for all waste flows is assumed to be 160.93 km.

1.11. Product Installation

General installation guidance of Fireframes® Curtainwall Series can be found [online](#). Fireframes® Curtainwall Series is field-erected and installed by professional teams. Installation equipment and material handling equipment are required though not included in the study as these are multi-use tools and the impacts per declared unit is considered negligible. Installation waste is generated and disposed of in this stage. Installation waste disposal have been modeled as per guidelines in section 2.8.5 of *Part A: Life Cycle Assessment Calculation Rules and Report Requirements* from UL Environment. Installation waste are either landfilled, incinerated or recycled.

Product should be installed by a professional and is subject to commercial building codes. Proper equipment, including protective equipment, should be used. TGP products must be installed in full compliance with manufacturer's written instructions, which are included with each product.

1.12. Reuse, Recycling, and Energy Recovery

Fireframes® Curtainwall Series may be recycled or resued at the end of life. The LCA that this EPD is created from takes the conservative approach by assuming that all products are disposed of within the system boundary.

1.13. Disposal

Disposal pathways in the EPD are modeled in accordance with disposal routes and waste classification referenced in Sections 2.8.5 and 2.8.6 of *Part A: Life Cycle Assessment Calculation Rules and Report Requirements* from UL Environment. This indicates an end-of-life split amongst landfill, recycling, and incineration pathways. For metals disposed in the United States, 85% is recycled and 15% is landfilled. All glass and plastics are landfilled in the United States.

2. Life Cycle Assessment Background Information

2.1. Declared Unit

The declared unit for curtain wall is 1 square meter of installed fire-rated frame with glass installed in a North American standard commercial building, as indicated in Table 3.

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025, EN 15804 and ISO 21930:2017

Table 3: Declared Unit Details

| NAME | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-101 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-201 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 120-202 | UNIT |
|---------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------|
| Declared Unit | One square meter | | | |
| Mass per declared unit, including fasteners | 69.01 | 78,09 | 103.51 | kg |
| Reference Service Life (RSL) | N/A | | | years |

The fasteners needed for installation are supplied by the manufacturer with the product and therefore are accounted for together with the product.

2.2. System Boundary

The type of EPD is cradle-to-gate with options. All LCA modules are included and are summarized in Table 4.

Table 4: Summary of Included Life Cycle Stages

| MODULE NAME | DESCRIPTION | ANALYSIS PERIOD | SUMMARY OF INCLUDED ELEMENTS |
|-------------|------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A1 | Product Stage: Raw Material Supply | 2021 | Raw Material sourcing and processing as defined by secondary data. |
| A2 | Product Stage: Transport | 2021 | Shipping from supplier to manufacturing site. Fuel use requirements estimated based on product weights and estimated distance. |
| A3 | Product Stage: Manufacturing | 2021 | Energy, water and material inputs required for manufacturing products from raw materials. Packaging materials and manufacturing waste are included as well. |
| A4 | Construction Process Stage: Transport | 2021 | Shipping from manufacturing site to project site. Fuel use requirements estimated based on product weights and mapped distances. |
| A5 | Construction Process Stage: Installation | 2021 | Installation materials, installation waste and packaging material waste. |
| B1 | Use Stage: Use | N/A | The usage of this product does not result in direct material impacts or emissions. |
| B2 | Use Stage: Maintenance | N/A | The maintenance of the products does not involve any consumption of energy or resources. |
| B3 | Use Stage: Repair | N/A | The product does not require repairing once installed. |
| B4 | Use Stage: Replacement | N/A | Total materials and energy required to manufacture the replacements needed to meet the functional unit. |
| B5 | Use Stage: Refurbishment | N/A | The products do not require refurbishment once installed. |
| B6 | Operational Energy Use | N/A | Operational energy consumption for door frame products was not considered as Part B Curtaining PCR. |
| B7 | Operational Water Use | N/A | The use of the products does not impact the operational water use of the building. |
| C1 | EOL: Deconstruction | 2021 | No inputs required for deconstruction. |
| C2 | EOL: Transport | 2021 | Shipping from project site to landfill. Distance assumed to be 200 km from installation site to landfill. |



ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025, EN 15804 and ISO 21930:2017

| MODULE NAME | DESCRIPTION | ANALYSIS PERIOD | SUMMARY OF INCLUDED ELEMENTS |
|-------------|------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C3 | EOL: Waste Processing | 2021 | Waste processing not required. All waste can be processed as is. |
| C4 | EOL: Disposal | 2021 | The disposal process of the product varies with the material type as per Part A Section 2.8.5. The impacts from landfilling and recycling are modeled based on secondary data. |
| D | Benefits beyond system | N/A | Module not declared |

2.3. Estimates and Assumptions

All estimates and assumptions are within the requirements of ISO 14040/44. The majority of the estimations are within the primary data. The primary data was collected as annual totals including all utility usage and production information. For the LCA, the usage information was divided by the production in pieces to create an energy and water use per declared unit, i.e., one unit of product. Other assumptions are listed below:

- It is assumed stamping is the manufacturing process of the upstream metal part when either the appropriate process wasn't available or was unknown.
- Several proxies were chosen from materials within the model due to the lack of appropriate secondary data and have been described in the raw materials section.
- The use and selection of secondary datasets from GaBi – The selection of which generic dataset to use to represent an aspect of a supply chain is a significant value choice. Collaboration between LCA practitioners, TGP associates and GaBi data experts was valuable in determining best-case scenarios in the selection of data. However, no generic data can be a perfect fit. Improved supply chain specific data would improve the accuracy of results, however budgetary and time constraints have to be taken into account.
- The installation tools are used enough times that the per unit of product impacts are negligible.

2.4. Cut-off Criteria

All inputs in which data was available were included. Material inputs greater than 1% (based on total mass of the final product) were included within the scope of analysis. Material inputs less than 1% were included if sufficient data was available to warrant inclusion and/or the material input was thought to have significant environmental impact. Cumulative excluded material inputs and environmental impacts are less than 5% based on total weight of the declared unit.

There is no excluded material or energy input or output, except as noted below:

- The packaging materials are excluded.
- As the tools used during the installation of the product are multi-use tools and can be reused after each installation, the per-declared unit impacts are considered negligible and therefore are not included. However, the electricity used to drill holes for installation has been included.
- Some material inputs may have been excluded within the secondary GaBi datasets used for this project. All GaBi datasets have been critically reviewed and conform to the exclusion requirements of the PCR.

2.5. Data Sources

Primary data were collected by facility personnel and from utility bills and was used for all manufacturing processes.



ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025,
EN 15804 and ISO 21930:2017

Whenever available, supplier data was used for raw materials used in the production process. When primary data did not exist, secondary data for raw material production was utilized from GaBi 10.6.1.135, GaBi Database Version 2022.1.

2.6. Data Quality

Geographical Coverage

The geographical scope of the manufacturing portion of the life cycle is Perrysburg, OH and Snoqualmie, WA. This EPD uses country specific energy datasets that take into account US eGrid specific energy and transportation mixes. Overall geographic data quality is considered good.

Time Coverage

Primary data were provided by TGP associates and represent calendar year 2021. Using 2021 data meets the PCR requirement that manufacturer specific data be within the last 5 years. Time coverage of this data is considered very good. Data necessary to model unit processes was sourced from Sphera LCI datasets. All the datasets used in the model are within 5 years old except nine used for background modeling (eight within 10 years and one of 13 years). All datasets rely on at least one 1-year average data. Overall time coverage of the datasets is considered good and meets the requirement of the PCR that all data be updated within a 10-year period. The specific time coverage of secondary datasets can be referenced in the dataset references table in each supplemental LCA report.

Technological Coverage

Primary data provided by TGP are specific to the technology that the company uses in manufacturing their product. It is site specific and considered of good quality. It is worth noting that the energy and water used in manufacturing the product includes overhead energy such as lighting, heating and sanitary use of water. Sub-metering was not available to extract process only energy and water use from the total energy use. Sub-metering would improve the technological coverage of data quality. Data necessary to model cradle-to-grave unit processes was sourced from Sphera LCI datasets (GaBi). Technological coverage of the datasets is considered good relative to the actual supply chain of TGP. While improved life cycle data from suppliers would improve technological coverage, the use of lower quality generic datasets does meet the goal of this EPD.

Completeness

The data included is consider complete. The LCA model included all known material and energy flows, with the exception of what is listed in Section 2.4. As pointed out in that section, no known flows above 1% were excluded and the sum of all excluded flows totals less than 5%.

2.7. Period under Review

The period under review is calendar year 2021.

2.8. Allocation

General principles of allocation were based on ISO 14040/44. Where possible, allocation was avoided. To derive a per-unit value for manufacturing inputs such as electricity, thermal energy, and water, allocation based on total production in pieces was adopted. Discussions with TGP staff divulged this was a more representative way to allocate the manufacturing inputs based on the manufacturing processes used and the types of products created. There are several

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025, EN 15804 and ISO 21930:2017

other products that are assembled and packaged within the same facility. It is assumed that energy used for these purposes are the same across different products. Regarding secondary datasets, as a default, GaBi datasets use a physical mass basis for allocation.

3. Life Cycle Assessment Scenarios¹

Table 5: Transport to the building site (A4)

| NAME | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-101 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-201 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 120-202 | UNIT |
|------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------|
| Fuel type | Diesel | | | - |
| Liters of fuel | 38.43 | | | l/100km |
| Vehicle type | Truck – Trailer, basic enclosed/ 50,000 lb. payload | | | - |
| Transport distance | 1.82E+03 | | | km |
| Capacity utilization | 65 | | | % |
| Weight of products transported | 69.01 | 78,09 | 103.51 | kg |
| Volume of products transported | 113.56 | | | m ³ |
| Capacity utilization volume factor | 1 | | | - |

Table 6: Installation into the building (A5)

| NAME | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-101 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-201 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 120-202 | UNIT |
|-----------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------|
| Auxiliary | The fasteners for installation are accounted for in A1-A3. | | | |
| Other resources (silicone sealant) | 4.54E-01 | | | kg |
| Water consumption | 0 | | | m3 |
| Electricity | 1 | | | kWh |
| Other energy carriers | 0 | | | MJ |
| Material loss | 0 | | | kg |
| Output substances following waste treatment on site | 1.79E-01 | | | kg |
| Dust in the air | 0 | | | kg CO ₂ |
| VOC emission | N/A | | | µg/m ³ |

¹ The tables for B1, B2, B3, B5, B6 and B7 are not included as these stages do not involve any flow input or output.



ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass

According to ISO 14025, EN 15804 and ISO 21930:2017

Table 7: End of life (C1-C4)

| NAME | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-101 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 60-201 | FIREFRAMES® CURTAINWALL SERIES WITH PILKINGTON PYROSTOP® MONOLITHIC GLASS 120-202 | UNIT |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|
| Assumptions for scenario development | The deconstruction of the hardware is assumed to be manual. The deconstructed product is collected with mixed construction waste. As required by the PCR Par A, the waste classification is based on the RCRA for North American region, and the non-metal waste is 100% landfilled, while the metal waste is 85% recycled and 15% landfilled. | | | |
| Collected with mixed construction waste | 6.90E+01 | 7.81E+01 | 1.04E+02 | kg |
| Non-metal Landfilling – 100% | 4.96E+01 | 5.86E+01 | 8.41E+01 | kg |
| Metal Waste Recycling (85%) | 1.65E+01 | 1.65E+01 | 1.67E+01 | kg |
| Metal Waste Landfilling (15%) | 2.92E+00 | 2.92E+00 | 2.94E+00 | kg |
| Product or material for final deposition | 5.25E+01 | 6.16E+01 | 8.70E+01 | kg |

4. Life Cycle Assessment Results

Table 8: Description of the system boundary modules

| | PRODUCT STAGE | | | CONSTRUCTION PROCESS STAGE | | USE STAGE | | | | | | | END OF LIFE STAGE | | | | BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY |
|------------------------|---------------------|-----------|---------------|-----------------------------|------------------|-----------|-------------|--------|-------------|---------------|----------------------------------------------------|---------------------------------------------------|-------------------|-----------|------------------|----------|-----------------------------------------------|
| | A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| | Raw material supply | Transport | Manufacturing | Transport from gate to site | Assembly/Install | Use | Maintenance | Repair | Replacement | Refurbishment | Building Operational Energy Use During Product Use | Building Operational Water Use During Product Use | Deconstruction | Transport | Waste processing | Disposal | Reuse, Recovery, Recycling Potential |
| Cradle to Grave | X | | | X | X | MND | | | | | | | X | X | X | X | MND |



ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass



According to ISO 14025, EN 15804 and ISO 21930:2017

4.1. Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® 60-101 Monolithic Glass

| Impact Category | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|--------------------------------------------|----------|-----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|-----------|----------|----------|-----|
| CML Impacts (Europe, Rest of World) | | | | | | | | | | | | | | | |
| GWP [kg CO2 eq] | 3.80E+02 | 1.72E+01 | 3.56E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 8.90E-01 | 0.00E+00 | 2.27E+00 | MND |
| ODP [kg CFC 11 eq] | 7.05E-08 | 1.84E-12 | 1.77E-11 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 9.52E-14 | 0.00E+00 | 4.15E-12 | MND |
| AP [kg SO2 eq] | 1.81E+00 | 2.28E-02 | 9.15E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.85E-03 | 0.00E+00 | 8.99E-03 | MND |
| EP [kg Phosphate eq] | 2.12E-01 | 7.61E-03 | 9.60E-04 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 5.69E-04 | 0.00E+00 | 1.72E-03 | MND |
| POCP [kg Ethene eq] | 1.06E-01 | -5.72E-03 | 1.08E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | -6.32E-04 | 0.00E+00 | 9.66E-05 | MND |
| ADP-elements [kg Sb eq] | 1.25E-03 | 5.66E-06 | 6.90E-05 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.93E-07 | 0.00E+00 | 1.00E-06 | MND |
| ADP-fossil fuel [MJ] | 5.07E+03 | 2.40E+02 | 5.01E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.24E+01 | 0.00E+00 | 3.31E+01 | MND |
| TRACI Impacts (North America) | | | | | | | | | | | | | | | |
| AP [kg SO2 eq] | 1.95E+00 | 3.04E-02 | 9.48E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.51E-03 | 0.00E+00 | 9.87E-03 | MND |
| EP [kg N eq] | 1.31E-01 | 3.94E-03 | 6.18E-04 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.64E-04 | 0.00E+00 | 1.07E-03 | MND |
| GWP [kg CO2 eq] | 3.78E+02 | 1.71E+01 | 3.54E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 8.87E-01 | 0.00E+00 | 2.25E+00 | MND |
| ODP [kg CFC 11 eq] | 7.57E-08 | 3.25E-14 | 3.06E-13 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.68E-15 | 0.00E+00 | 7.13E-14 | MND |
| Resources [MJ] | 5.56E+02 | 3.20E+01 | 5.04E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.66E+00 | 0.00E+00 | 4.29E+00 | MND |
| POCP [kg O3 eq] | 2.94E+01 | 6.84E-01 | 1.47E-01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 5.73E-02 | 0.00E+00 | 1.70E-01 | MND |
| Carbon Emissions and Uptake | | | | | | | | | | | | | | | |
| BCRP [kg CO2] | 4.44E-02 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| BCEP [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 3.76E-02 | 0.00E+00 | MND |
| BCRK [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| BCEK [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| BCEW [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| CCE [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| CCR [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| CWNR [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame
with Pilkington Pyrostop® Monolithic Glass



According to ISO 14025,
EN 15804 and ISO 21930:2017

| Impact Category | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|------------------------------------------|----------|----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----|
| Resource Use Indicators | | | | | | | | | | | | | | | |
| RPR _E [MJ] | 1.12E+03 | 9.40E+00 | 2.68E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 4.87E-01 | 0.00E+00 | 3.18E+00 | MND |
| RPR _M [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| RPR _T [MJ] | 1.12E+03 | 9.40E+00 | 2.68E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 4.87E-01 | 0.00E+00 | 3.18E+00 | MND |
| NRPR _E [MJ] | 5.42E+03 | 2.42E+02 | 5.86E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.25E+01 | 0.00E+00 | 3.39E+01 | MND |
| NRPR _M [MJ] | 5.56E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| NRPR _T [MJ] | 5.42E+03 | 2.42E+02 | 5.86E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.25E+01 | 0.00E+00 | 3.39E+01 | MND |
| SM [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| RSF [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| NRSF [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| RE [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| FW [m3] | 2.24E+00 | 3.38E-02 | 3.98E-02 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.75E-03 | 0.00E+00 | 4.87E-03 | MND |
| Output Flows and Waste Categories | | | | | | | | | | | | | | | |
| HWD [kg] | 8.44E-01 | 1.00E-09 | 6.83E-09 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 5.20E-11 | 0.00E+00 | 1.27E-09 | MND |
| NHWD [kg] | 1.67E+01 | 2.08E-02 | 7.90E-01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.08E-03 | 0.00E+00 | 5.30E+01 | MND |
| HLRW [kg] | 1.84E-04 | 7.94E-07 | 2.93E-06 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 4.11E-08 | 0.00E+00 | 3.39E-07 | MND |
| ILLRW [kg] | 1.45E-01 | 6.69E-04 | 3.34E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 3.47E-05 | 0.00E+00 | 2.97E-04 | MND |
| CRU [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| MR [kg] | 2.74E+01 | 0.00E+00 | 1.02E-01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 1.62E+01 | 0.00E+00 | MND |
| MER [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| EEE [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 7.62E-03 | MND |
| EET [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 3.59E-03 | MND |
| EE [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 1.12E-02 | MND |

4.2 Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® 60-201 Monolithic Glass

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame
with Pilkington Pyrostop® Monolithic Glass



According to ISO 14025,
EN 15804 and ISO 21930:2017

| Impact Category | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|--------------------------------------------|----------|-----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|-----------|----------|----------|-----|
| CML Impacts (Europe, Rest of World) | | | | | | | | | | | | | | | |
| GWP [kg CO2 eq] | 4.33E+02 | 1.95E+01 | 3.56E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.01E+00 | 0.00E+00 | 2.65E+00 | MND |
| ODP [kg CFC 11 eq] | 7.60E-08 | 2.08E-12 | 1.77E-11 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.08E-13 | 0.00E+00 | 4.87E-12 | MND |
| AP [kg SO2 eq] | 2.09E+00 | 2.58E-02 | 9.15E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.09E-03 | 0.00E+00 | 1.05E-02 | MND |
| EP [kg Phosphate eq] | 2.47E-01 | 8.61E-03 | 9.60E-04 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 6.44E-04 | 0.00E+00 | 1.92E-03 | MND |
| POCP [kg Ethene eq] | 1.21E-01 | -6.47E-03 | 1.08E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | -7.15E-04 | 0.00E+00 | 1.11E-04 | MND |
| ADP-elements [kg Sb eq] | 1.39E-03 | 6.40E-06 | 6.90E-05 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 3.31E-07 | 0.00E+00 | 1.17E-06 | MND |
| ADP-fossil fuel [MJ] | 5.80E+03 | 2.72E+02 | 5.01E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.41E+01 | 0.00E+00 | 3.88E+01 | MND |
| TRACI Impacts (North America) | | | | | | | | | | | | | | | |
| AP [kg SO2 eq] | 2.25E+00 | 3.44E-02 | 9.48E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.84E-03 | 0.00E+00 | 1.15E-02 | MND |
| EP [kg N eq] | 1.53E-01 | 4.46E-03 | 6.18E-04 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.99E-04 | 0.00E+00 | 1.16E-03 | MND |
| GWP [kg CO2 eq] | 4.30E+02 | 1.94E+01 | 3.54E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.00E+00 | 0.00E+00 | 2.63E+00 | MND |
| ODP [kg CFC 11 eq] | 8.15E-08 | 3.68E-14 | 3.06E-13 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.90E-15 | 0.00E+00 | 8.35E-14 | MND |
| Resources [MJ] | 6.43E+02 | 3.62E+01 | 5.04E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.88E+00 | 0.00E+00 | 5.03E+00 | MND |
| POCP [kg O3 eq] | 3.41E+01 | 7.74E-01 | 1.47E-01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 6.48E-02 | 0.00E+00 | 2.00E-01 | MND |
| Carbon Emissions and Uptake | | | | | | | | | | | | | | | |
| BCRP [kg CO2] | 4.44E-02 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| BCEP [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 3.76E-02 | 0.00E+00 | MND |
| BCRK [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| BCEK [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| BCEW [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| CCE [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| CCR [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| CWNR [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® Monolithic Glass



According to ISO 14025, EN 15804 and ISO 21930:2017

| Impact Category | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|------------------------------------------|----------|----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----|
| Resource Use Indicators | | | | | | | | | | | | | | | |
| RPR_E [MJ] | 1.29E+03 | 1.06E+01 | 2.68E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 5.51E-01 | 0.00E+00 | 3.72E+00 | MND |
| RPR_M [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| RPR_T [MJ] | 1.29E+03 | 1.06E+01 | 2.68E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 5.51E-01 | 0.00E+00 | 3.72E+00 | MND |
| NRPR_E [MJ] | 6.21E+03 | 2.74E+02 | 5.86E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.42E+01 | 0.00E+00 | 3.97E+01 | MND |
| NRPR_M [MJ] | 5.56E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| NRPR_T [MJ] | 6.22E+03 | 2.74E+02 | 5.86E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.42E+01 | 0.00E+00 | 3.97E+01 | MND |
| SM [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| RSF [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| NRSF [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| RE [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| FW [m3] | 2.49E+00 | 3.82E-02 | 3.98E-02 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.98E-03 | 0.00E+00 | 5.70E-03 | MND |
| Output Flows and Waste Categories | | | | | | | | | | | | | | | |
| HWD [kg] | 1.00E+00 | 1.14E-09 | 6.83E-09 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 5.89E-11 | 0.00E+00 | 1.49E-09 | MND |
| NHWD [kg] | 1.90E+01 | 2.35E-02 | 7.90E-01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.22E-03 | 0.00E+00 | 6.21E+01 | MND |
| HLRW [kg] | 2.12E-04 | 8.99E-07 | 2.93E-06 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 4.65E-08 | 0.00E+00 | 3.97E-07 | MND |
| ILLRW [kg] | 1.67E-01 | 7.58E-04 | 3.34E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 3.92E-05 | 0.00E+00 | 3.48E-04 | MND |
| CRU [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| MR [kg] | 3.18E+01 | 0.00E+00 | 1.02E-01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 1.62E+01 | 0.00E+00 | MND |
| MER [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| EEE [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 7.62E-03 | MND |
| EET [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 3.59E-03 | MND |
| EE [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 1.12E-02 | MND |

4.2. Fireframes® Curtainwall Series Fire-rated Frame with Pilkington Pyrostop® 120-202

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame
with Pilkington Pyrostop® Monolithic Glass



According to ISO 14025,
EN 15804 and ISO 21930:2017

| Impact Category | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|--------------------------------------------|----------|-----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|-----------|----------|----------|-----|
| CML Impacts (Europe, Rest of World) | | | | | | | | | | | | | | | |
| GWP [kg CO2 eq] | 5.77E+02 | 2.58E+01 | 3.54E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.33E+00 | 0.00E+00 | 3.70E+00 | MND |
| ODP [kg CFC 11 eq] | 9.13E-08 | 2.77E-12 | 1.77E-11 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.43E-13 | 0.00E+00 | 6.86E-12 | MND |
| AP [kg SO2 eq] | 2.78E+00 | 3.42E-02 | 8.82E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.77E-03 | 0.00E+00 | 1.47E-02 | MND |
| EP [kg Phosphate eq] | 3.37E-01 | 9.25E-03 | 9.35E-04 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 7.41E-04 | 0.00E+00 | 2.34E-03 | MND |
| POCP [kg Ethene eq] | 1.63E-01 | -8.60E-03 | 1.08E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | -9.49E-04 | 0.00E+00 | 1.50E-04 | MND |
| ADP-elements [kg Sb eq] | 5.27E-04 | 8.30E-06 | 6.16E-05 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 4.30E-07 | 0.00E+00 | 1.00E-06 | MND |
| ADP-fossil fuel [MJ] | 7.50E+03 | 3.03E+02 | 4.73E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.57E+01 | 0.00E+00 | 4.29E+01 | MND |
| TRACI Impacts (North America) | | | | | | | | | | | | | | | |
| AP [kg SO2 eq] | 3.11E+00 | 4.57E-02 | 9.48E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 3.77E-03 | 0.00E+00 | 1.62E-02 | MND |
| EP [kg N eq] | 2.15E-01 | 5.93E-03 | 6.18E-04 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 3.97E-04 | 0.00E+00 | 1.42E-03 | MND |
| GWP [kg CO2 eq] | 5.77E+02 | 2.58E+01 | 3.54E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.33E+00 | 0.00E+00 | 3.70E+00 | MND |
| ODP [kg CFC 11 eq] | 9.77E-08 | 4.88E-14 | 3.06E-13 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.53E-15 | 0.00E+00 | 1.18E-13 | MND |
| Resources [MJ] | 8.87E+02 | 4.81E+01 | 5.04E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.49E+00 | 0.00E+00 | 7.09E+00 | MND |
| POCP [kg O3 eq] | 4.73E+01 | 1.03E+00 | 1.47E-01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 8.60E-02 | 0.00E+00 | 2.82E-01 | MND |
| Carbon Emissions and Uptake | | | | | | | | | | | | | | | |
| BCRP [kg CO2] | 4.44E-02 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| BCEP [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 3.76E-02 | 0.00E+00 | MND |
| BCRK [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| BCEK [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| BCEW [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| CCE [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| CCR [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| CWNR [kg CO2] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame
with Pilkington Pyrostop® Monolithic Glass



According to ISO 14025,
EN 15804 and ISO 21930:2017

| Impact Category | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|------------------------------------------|----------|----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----|
| Resource Use Indicators | | | | | | | | | | | | | | | |
| RPR_E [MJ] | 1.76E+03 | 1.41E+01 | 2.68E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 7.31E-01 | 0.00E+00 | 5.25E+00 | MND |
| RPR_M [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| RPR_T [MJ] | 1.76E+03 | 1.41E+01 | 2.68E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 7.31E-01 | 0.00E+00 | 5.25E+00 | MND |
| NRPR_E [MJ] | 8.44E+03 | 3.64E+02 | 5.86E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.88E+01 | 0.00E+00 | 5.60E+01 | MND |
| NRPR_M [MJ] | 5.56E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| NRPR_T [MJ] | 8.44E+03 | 3.64E+02 | 5.86E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.88E+01 | 0.00E+00 | 5.60E+01 | MND |
| SM [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| RSF [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| NRSF [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| RE [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| FW [m3] | 3.22E+00 | 5.08E-02 | 3.98E-02 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 2.63E-03 | 0.00E+00 | 8.05E-03 | MND |
| Output Flows and Waste Categories | | | | | | | | | | | | | | | |
| HWD [kg] | 1.44E+00 | 1.51E-09 | 6.83E-09 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 7.82E-11 | 0.00E+00 | 2.10E-09 | MND |
| NHWD [kg] | 2.55E+01 | 3.12E-02 | 7.90E-01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 1.62E-03 | 0.00E+00 | 8.76E+01 | MND |
| HLRW [kg] | 2.93E-04 | 1.19E-06 | 2.93E-06 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 6.18E-08 | 0.00E+00 | 5.60E-07 | MND |
| ILLRW [kg] | 2.30E-01 | 1.01E-03 | 3.34E-03 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 5.21E-05 | 0.00E+00 | 4.91E-04 | MND |
| CRU [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| MR [kg] | 4.42E+01 | 0.00E+00 | 1.02E-01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 1.64E+01 | 0.00E+00 | MND |
| MER [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND |
| EEE [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 7.62E-03 | MND |
| EET [MJ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 3.59E-03 | MND |
| EE {MJ} | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 1.12E-02 | MND |

ENVIRONMENTAL PRODUCT DECLARATION



Fireframes® Curtainwall Series Fire-rated Frame
with Pilkington Pyrostop® Monolithic Glass



According to ISO 14025,
EN 15804 and ISO 21930:2017

5. LCA Interpretation

Overall, the vast majority of the product system's impacts are found in A1-A3, mainly derived from the major materials: glass sheets and steel components. Increasing the use of recycled content and reducing the scrap rate are recommended to reduce the environmental impact of the product system.

6. Additional Environmental Information

6.1. Environment and Health During Manufacturing

TGP meets all federal and state standards related to the Environment and Health during manufacturing. Beyond what is regulated, there are no additional environment and health considerations during the production of goods.

6.2. Environment and Health During Installation

The installation instruction that can be found on TGP's website should be referred to and followed to have proper and safe installation.

6.3. Environment and Health During Use

There are no environmental or health considerations during the use of the product.

6.4. Extraordinary Effects

Fire

Fireframes® Curtainwall Series fire-rated frames meet the broadest fire rating requirements. When combined with Pilkington Pyrostop® at 60 minutes or greater, is classified and listed with UL as a transparent wall, a fire resistive assembly that blocks the transfer of radiant heat during a fire. Lower ratings (45 minute) are considered a window assembly.

Water

Should the product become flooded, the water should be removed by means of extraction and drying and the product should behave as originally intended. There are no environmental impacts associated with the product being flooded.

Mechanical Destruction

If the product is mechanically destroyed, it should be disposed using standard procedures and replaced promptly.





Fireframes® Curtainwall Series Fire-rated Frame
with Pilkington Pyrostop® Monolithic Glass



According to ISO 14025,
EN 15804 and ISO 21930:2017

7. Supporting Documentation

The full text of the acronyms found in Section 4 are found in Table 9.

Table 9: Acronym Key

| ACRONYM | TEXT | ACRONYM | TEXT |
|----------------|---------------------------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------|
| LCA Indicators | | | |
| ADP-elements | Abiotic depletion potential for non-fossil resources | GWP | Global warming potential |
| ADP-fossil | Abiotic depletion potential for fossil resources | ODP | Depletion of stratospheric ozone layer |
| AP | Acidification potential of soil and water | POCP | Photochemical ozone creation potential |
| EP | Eutrophication potential | Resources | Depletion of non-renewable fossil fuels |
| LCI Indicators | | | |
| PERE | Use of renewable primary energy excluding renewable primary energy resources used as raw materials | PENRT | Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) |
| PERM | Use of renewable primary energy resources used as raw materials | SM | Use of secondary materials |
| PERT | Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) | RSF | Use of renewable secondary fuels |
| PENRE | Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials | NRSF | Use of non-renewable secondary fuels |
| PENRM | Use of non-renewable primary energy resources used as raw materials | FW | Net use of fresh water |
| HWD | Disposed-of-hazardous waste | MR | Materials for recycling |
| NHWD | Disposed-of non-hazardous waste | MER | Materials for energy recovery |
| ILLRW | Disposed-of intermediate- and low-level radioactive waste | EEE | Exported electrical energy |
| HLRW | Disposed-of high-level radioactive waste | EET | Exported thermal energy |
| CRU | Components for reuse | EE | Exported energy |





Fireframes® Curtainwall Series Fire-rated Frame
with Pilkington Pyrostop® Monolithic Glass



According to ISO 14025,
EN 15804 and ISO 21930:2017

8. References

1. Life Cycle Assessment, Allegion, LCA for EPD Generation Tool Report for Curtain Walls, Doors and Frames. WAP Sustainability Consulting. March 2021.
2. Product Category Rules for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements UL – 10010 Version 3.2. UL Environment.
3. PCR Guidance-Texts for Building-related Products and Services Part B: Requirements on the EPD for Curtain walling. Institut Bauen und Umwelt e.V. Version 1.6
4. ISO 14044: 2006 Environmental Management – Life cycle assessment – Requirements and Guidelines.
5. ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures.
6. ISO 14044: 2006/ Amd 1:2017 Environmental Management – Life cycle assessment – Requirements and Guidelines – Amendment 1.
7. ISO 21930:2017 Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services.
8. UL Environment General Program Instructions, March 2020, version 2.5.
9. CML-IA Characterization Factors. 5 September 2016. <https://www.universiteitleiden.nl/en/research/research-output/science/cml-ia-characterization-factors>
10. Bare, J.C., G.A. Norris, D.W. Pennington, and T. McKone (2003). TRACI: The Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts. *Journal of Industrial Ecology* 6(3), pp. 49-78.
11. Bare, J., TRACI 2.0: The Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts 2.0. *Clean Technologies and Environmental Policy* 2011, 13, (5).
12. US Department of Energy, 2003. Energy Use in Selected Metalcasting Facilities. https://www.energy.gov/sites/prod/files/2013/11/f4/energyuseinselectedmetalcasting_5_2_8_04.pdf