ALLEGION™

VON DUPRIN®

INPACT™ 94 and 95

Exit Device

Introduction

Flexible solutions for real-world applications

There's a reason why customers have trusted Von Duprin® to keep them safe for more than 100 years. From robust materials to flexible design, Von Duprin products are engineered with you in mind. Quiet electric latch retraction (QEL) and field reversible handing provide versatility and allow 94/95 Series devices to be easily customized for your needs.

Commonly used in facilities where building openings must accommodate high volumes of people and equipment, the INPACT™ 94/95 Series provides a recessed push pad design that can reduce impact and protect it from abuse. A variety of finishes, trim functions and mechanical and electronic options allow you to accommodate for a variety of applications.

Passion driving performance

Von Duprin's exit devices offer durable solutions that are proven in the field to perform under heavy use and abuse and backed by a team of experts experienced in door hardware application and code compliance. Allegion stands behind every Von Duprin product we make with unparalleled customer support thanks to our team of experts based in the U.S. that average more than 15 years of experience, so you are assured to receive expert advice.

Information and Customer Support

us.Allegion.com

US: 1-877-671-7011
Canada: 1-800-900-4734

Support@Allegion.com
Exits_TechProdSupport@Allegion.com

www.YouTube.com/VonDuprinSafety/

Ordering

Allegion_Orders@Allegion.com

Fax: 1-800-999-0328

BAA

Allegion offers a wide range of products that meet the BAA and BABA standards. Please visit the Allegion360 Partner Portal under Government Compliance Guide to view the most current listing of compliant products or reach out to your Allegion sales consultant.

Table of contents

General Information

How to order	4
Popular applications and handling	5
INPACT™ trim operation	5
Lever styles	6

Exit devices

9447/9547 INPACT™ concealed vertical rod devices	8
9447/9547 INPACT™ concealed vertical rod fire exit device	10
94/9548 INPACT™ concealed vertical rod fire exit device	12
9475/9575 mortise lock device	14
9475/9575-F mortise lock fire exit device	16
INPACT™ device options and accessories	18
INPACT™ trim selection	19

Additional information

UL listings, fire exit hardware label / opening size	20
Finishes	20
INPACT™ integrated door system	21

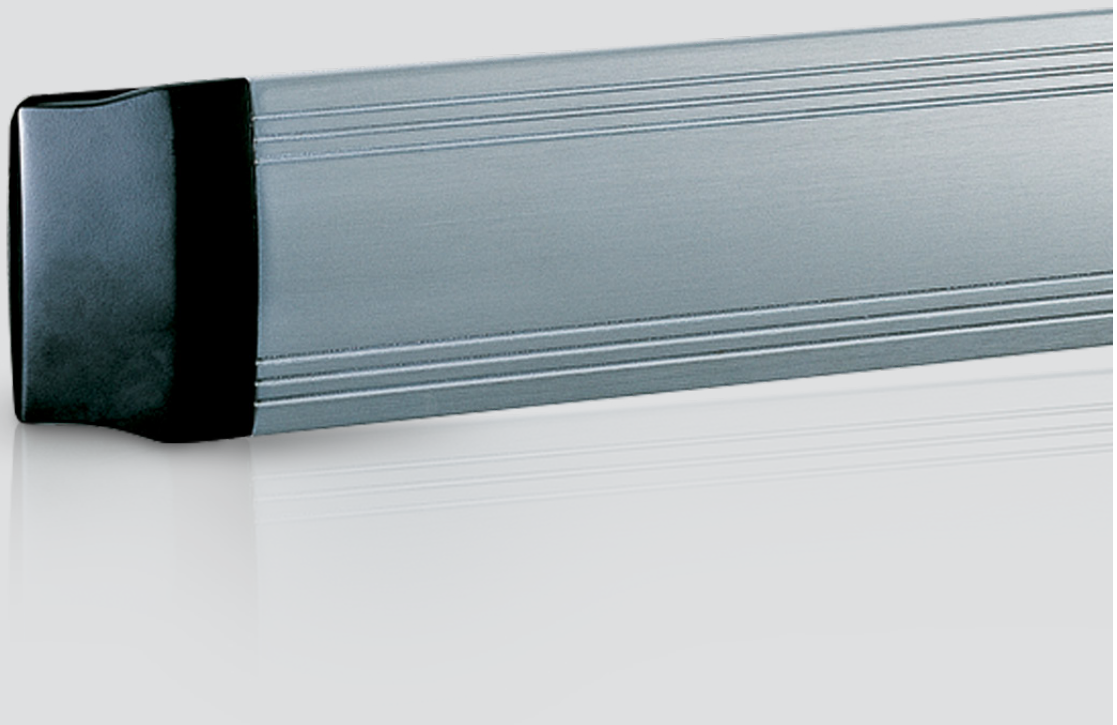

How to order

Prefix	Device series/type		Trim/ rating		Suffix/ finish		Door width	Handing	Less bottom rod	Trim options/ finish	Accessories	Other Information
1	2	3	4	5	6	7	8	9	10	11	12	13
QEL -	94 -	47 -	L -	F -	BE -	626 -	3' -	LBR -	LBR -	LC -	— -	— -

Detail

1 Prefixes

HW	Wind only - hurricane rated
LX	Latch bolt monitoring
SS	Signal switch
QEL	Quiet electric latch retraction

2 Device series

94	94 Series - smooth
95	95 Series - grooved

3 Device type

47	Concealed vertical rod device
48	Concealed vertical rods
75	Mortise lock device

4 Trim functions

DT	Dummy trim
EO	Exit only
L	Lever trim
NL	Night latch
TL	Turn lever

5 Rating

Blank	Panic exit hardware
F	Fire exit hardware

6 Suffix

AX	Accessible device
L-BE	Lever blank escutcheon
TL-BE	Turn lever blank escutcheon

7 Finish

605	Bright brass
606	Satin brass
612	Satin bronze
625	Bright chrome
626	Satin chrome
626AM	Satin chrome, antimicrobial
628	Aluminum, anodized
710	Dark brown, anodized
711	Flat black

8 Door width / Door thickness

3'	Standard default	1 3/4"	Standard

9 Handing

LHR	Left hand reverse
RHR	Right hand reverse

10 Less bottom rod

LBR	Less bottom rod

11 Trim options/finish

LC	Less control
LT	Less trim
376T	Thumbturn control - CV
550DT	Optional offset dummy trim
940L	Lever control
605	Bright brass
606	Satin brass
612	Satin bronze
613	Satin bronze-oil rubbed
622	Black matte
625	Bright chrome
626	Satin chrome
626AM	Satin chrome, antimicrobial
628	Aluminum, anodized
693	Painted black
695	Painted dark bronze
711	Flat black

12 Accessories

CYL	Include cylinder
PL	Pullman latch w/ES strike

13 Other information

Door material

HMD	Hollow metal

Door application

DE	Pair double egress doors
PR	Pair of doors
SGL	Single door

Popular applications and handling

Single door applications



Single mortise lock device

Double door applications



Two concealed vertical rods same swing



Two fire exit hardware concealed vertical rods with auxiliary fire latch-LBR option



Two concealed vertical rods double egress

Door handing

Left hand-reverse orientation

Right hand-reverse orientation

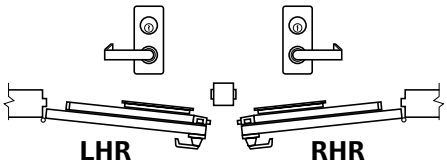

(Left hand-reverse)

(Right hand-reverse)

Outside

INPACT™ trim operation

Standard trim

Lever 940L*

L

Forged brass 1 3/8" (35mm) depth escutcheon. #06 lever is standard. Optional lever designs are available.

Note: 940L can be set for L-NL function during installation.

*Blank escutcheon "BE" available. Example: 940L-BE.

Optional trim

Dummy pull 550DT

DT

Heavy aluminum forged brackets with 10" (254mm) stainless steel pullbar.

Thumbturn 376T

TL

Forged brass 7/8" (22mm) escutcheon. It's often used with a 550DT pull trim.

Only available with concealed rod devices.

* Blank escutcheon "BE" available. Example: 376T-BE.

Note: Can be set for T-NL function during installation.

Lever styles

Decorative levers

M51
Knurling available

M52
Knurling available

M53

M54

M55

M56

M57 [1]

M61
(Handed)

M62 [1]
(Handed)

M63
(Handed)

M81
Knurling available

M82

M83

M84

M85
(Handed)

ME1 [2]
(Handed)

ME2 [2]
(Handed)

ME3 [2]

1. Available in stainless steel substrate ONLY.
2. Designed with Gensler as product design consultant.

Standard levers

01

02
Knurling available

03*
Knurling available

05

06*
Default lever
Knurling available

07

12
(Handed)

16
(Omega)

17*
Knurling available

18

ACC
(Accent)
(Handed)

AST
(Asti)
(Handed)

MER
(Merano)
(Handed)

LAT*
Latitude

LON*
Longitude

* Available in Stainless steel - specify SS when ordering
Example: 06SS.

Knurling - specify KN when ordering. Example: 06KN.

9447/9547 INPACT concealed vertical rod devices

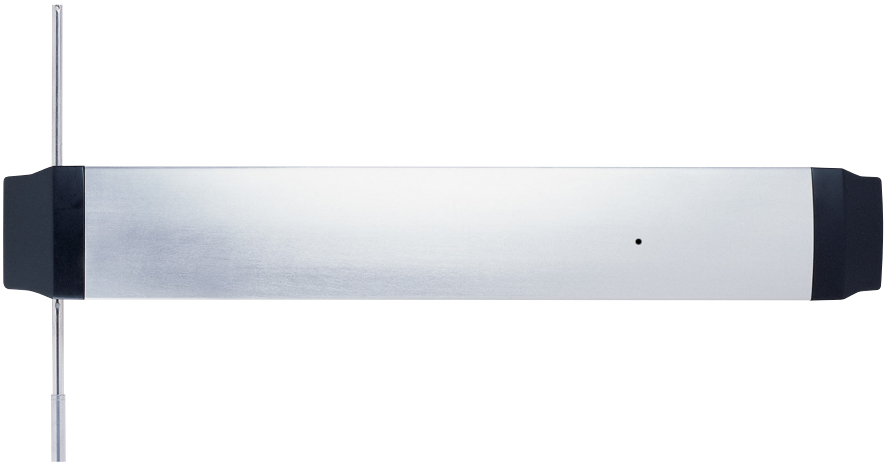

94/95 INPACT concealed vertical rod device for use on factory prepped steel doors, not available for wood doors. The INPACT device is UL listed for panic, ANSI/BHMA 156.3 Grade 1. The INPACT device is non-handed.

Finishes – 605, 606, 612, 625, 626, 626AM, 628, 710, 711

Top strike

Bottom strike

Top latch



Bottom latch

Hex key dogging comes standard on 94/95 Concealed vertical rod device



Specifications	
Device functions	Device ships EO, DT, TL, L Blank escutcheon (BE) available
Device lengths	2'6" Up to 2'9" for 24 5/32" device 2'10" up to 4' for 30 5/32" device
Device centerline from finished floor	39 5/8" (1006 mm)
Projection	1 5/8" (41 mm) neutral 1 1/4" (32 mm) depressed
Latch bolt	5/8" (16 mm) throw deadlocking latch bolt standard
Door undercut	1/4" (7 mm) maximum
Top & bottom latch case assembly	4 1/2" X 2 1/8" x 1 1/2" (114 mm x 54 mm x 38 mm)
Vertical rods	Two-piece adjustable rods, door 6'8" (2032 mm) to 8'0" (2540 mm) can be adjusted by removing the latchside endcap
Fasteners	Included for surface mounting to recessed door prep and through bolting to trim
Electric options	**QEL** quiet electric latch retraction **LX** latch bolt monitor switch
Mechanical options	**LBR** less bottom rod
Dogging option	Hex key dogging
Strikes	Top - 338 unfinished, bottom - 385A unfinished

QEL

Quiet electric latch retraction

- Bolt retraction via switch
- Converts exit door to push-pull operation

LX

Latch bolt monitor switch

- Signals use of an opening
- SPDT switch to monitor latch bolt

LBR

Less bottom rod

- For pairs of vertical rod devices

Standard trim

	EO	DT	TL
	Exit only	**Dummy trim** Pull when dogged	**Thumbturn key** Key locks & unlocks (Use with DT trim)
Product description	9447EO 9547EO	9447DT 9547DT	9447TL 9547TL
Trim description	—	550DT	550DT x 376T
Escutcheon plate size	—	—	7 1/2" x 1 11/16" (190mm x 43mm)
Pull overall length	—	3 5/8" x 11 9/16" (93 mm / 294mm)	—
Pull center to center	—	10" (254 mm)	—
Projection/Offset	—	2 5/8" x 1 7/8" (67 mm / 48mm)	2 5/8" x 1 7/8" (67 mm x 48mm)
ANSI function	01	02	11 or 12
Cylinder type	—	—	1 1/4" Mortise
Handing	—	—	—

	L	L-BE	L-DT
	Lever Key locks & unlocks	**Lever - Blank escutcheon** Always operable (no cylinder)	**Lever dummy trim** Pull when dogged
Product description	9447L 9547L	9447L-BE 9547L-BE	9447L-DT 9547L-DT
Trim description	940L	940L-BE	940L-DT
Escutcheon plate size	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)
Pull center to center	—	—	—
Projection	2 3/32" (75 mm)	2 3/32" (75 mm)	2 3/32" (75 mm)
ANSI function	08	14	02
Cylinder type	1 1/4" Mortise	—	—
Handing	Handed/Reversible	Handed/Reversible	Handed/Reversible

Note: L-NL function can be set up during installation of 940L trim.

9447/9547 INPACT concealed vertical rod fire exit device

Top strike

Bottom strike

Top latch

Bottom latch

94/95 INPACT concealed vertical rod fire exit device for use on factory prepped steel doors, not available for wood doors. The INPACT device is UL listed for panic and fire, ANSI/BHMA 156.3 Grade 1. The INPACT device is non-handed.

Finishes – 605, 606, 612, 625, 626, 626AM, 628, 710, 711

Specifications	
Device functions	Device ships EO, TL, L Blank escutcheon (BE) available
Device lengths	2'6" up to 2'9" for 24 5/32" device 2'10" up to 4' for 30 5/32" device
Device centerline from finished floor	39 5/8" (1006 mm)
Projection	1 5/8" (41 mm) neutral 1 1/4" (32 mm) depressed
Latch bolt	5/8" (16 mm) throw deadlocking latch bolt standard
Door undercut	1/4" (7 mm) maximum
Top & bottom latch case assembly	4 1/2" x 2 1/8" x 1 1/2" (114 mm x 54 mm x 38 mm)
Vertical rods	Two-piece adjustable rods, door 6'8" (2032 mm) to 8'0" (2540 mm) Can be adjusted by removing the latchside endcap
Fasteners	Included for surface mounting to recessed door prep and through bolting to trim
Electric options	**QEL** Quiet electric latch retraction **LX** Latch bolt monitor switch
Mechanical options	**LBR** Less bottom rod
Dogging option	No mechanical dogging
Strikes	Top - 338 unfinished, bottom - 385A unfinished

QEL

Quiet electric latch retraction

- Bolt retraction via switch
- Converts exit door to push-pull operation

LX

Latch bolt monitor switch

- Signals use of an opening
- SPDT switch to monitor latch bolt

LBR

Less bottom rod

- Available with UL fire Label
- For pairs of vertical rod devices

Standard trim

	EO **Exit only**	TL **Thumbturn key** Key locks & unlocks (use with DT trim)
Product description	9447EO -F 9547EO-F	9447TL-F 9547TL-F
Trim description	—	550DT x 376T
Escutcheon plate size	—	7 1/2" x 1 11/16" (190mm x 43mm)
Pull center to center	—	—
Projection/Offset	—	2 5/8" x 1 7/8" (67 mm x 48mm)
ANSI function	01	11 or 12
Cylinder type	—	1 1/4" Mortise
Handing	—	—

	L **Lever** Key locks & unlocks	L-BE **Lever - Blank escutcheon** Always operable (no cylinder)
Product description	9447L-F 9547L-F	9447L-BE-F 9547L-BE-F
Trim description	940L	940L-BE
Escutcheon plate size	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)
Pull center to center	—	—
Projection	2 3/32" (75 mm)	2 3/32" (75 mm)
ANSI function	08	14
Cylinder type	1 1/4" Mortise	—
Handing	Handed/Reversible	Handed/Reversible

Note: L-NL function can be set up during installation of 940L trim

9448/9548 INPACT concealed vertical rod fire exit device

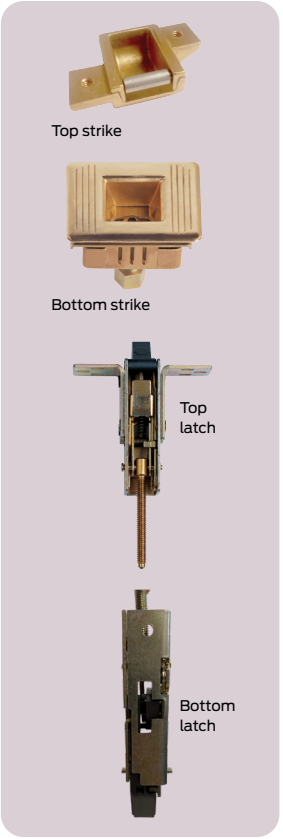

94/95 INPACT concealed vertical rod fire exit device for use on factory prepped steel doors, not available for wood doors. The INPACT device is UL listed for panic and fire, ANSI/BHMA 156.3 Grade 1. The INPACT device is non-handed.

Finishes – 605, 606, 612, 625, 626, 626AM, 628, 710, 711

Specifications	
Device functions	Device ships EO, TL, L Blank escutcheon (BE) available
Device lengths	2'6" up to 2'9" for 24 5/32" device 2'10" up to 4' for 30 5/32" device
Device centerline from finished floor	39 5/8" (1006 mm)
Projection	1 5/8" (41 mm) neutral 1 1/4" (32 mm) depressed
Latch bolt	5/8" (16 mm) throw deadlocking latch bolt standard
Door undercut	3/4" (19mm) maximum, more than 1/4" minimum
Top & bottom latch case assembly	4 1/2" x 2 1/8" x 1 1/2" (114 mm x 54 mm x 38 mm)
Vertical rods	Two-piece adjustable rods, door 6'8" (2032 mm) to 8'0" (2540 mm) Can be adjusted by removing the latchside endcap
Fasteners	Included for surface mounting to recessed door prep and through bolting to trim
Electric options	**QEL** Quiet electric latch retraction **LX** Latch bolt monitor switch
Mechanical options	**LBR** Less bottom rod
Dogging option	No mechanical dogging
Strikes	Top - 338 unfinished, bottom - 385A unfinished

QEL

Quiet electric latch retraction

- Bolt retraction via switch
- Converts exit door to push-pull operation

LX

Latch bolt monitor switch

- Signals use of an opening
- SPDT switch to monitor latch bolt

LBR

Less bottom rod

- Available with UL fire Label
- For pairs of vertical rod devices

Standard trim

	EO **Exit only**	TL **Thumbturn key** Key locks & unlocks (use with DT trim)
Product description	9447EO -F 9547EO-F	9447TL-F 9547TL-F
Trim description	—	550DT x 376T
Escutcheon plate size	—	7 1/2" x 1 11/16" (190mm x 43mm)
Pull center to center	—	—
Projection/Offset	—	2 5/8" x 1 7/8" (67 mm x 48mm)
ANSI function	01	11 or 12
Cylinder type	—	1 1/4" Mortise
Handing	—	—

	L **Lever** Key locks & unlocks	L-BE **Lever - blank escutcheon** Always operable (no cylinder)
Product description	9447L-F 9547L-F	9447L-BE-F 9547L-BE-F
Trim description	940L	940L-BE
Escutcheon plate size	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)
Pull center to center	—	—
Projection	2 3/32" (75 mm)	2 3/32" (75 mm)
ANSI function	08	14
Cylinder type	1 1/4" Mortise	—
Handing	Handed/Reversible	Handed/Reversible

Note: L-NL function can be set up during installation of 940L trim

9475/9575 INPACT mortise lock device

575 strike

94/95 INPACT mortise lock device for use on factory prepped steel doors, not available for wood doors. The INPACT device is UL listed for panic, ANSI/BHMA 156.3 Grade 1. The INPACT device is non-handed.

Finishes – 605, 606, 612, 625, 626, 626AM, 628, 710, 711

Hex key dogging comes standard on 94/95 Mortise lock device



Specifications	
Device functions	Device ships EO, DT, TL, L, NL Blank escutcheon (BE) available
Device lengths	2'6" up to 2'9" for 24 5/32" device 2'10" up to 4' for 30 5/32" device
Device centerline	39 5/8" (1006mm)
Mortise lock centerline from finished floor	48 1/8" (1222 mm)
Projection	1 5/8" (41 mm) neutral 1 1/4" (32 mm) depressed
Latch bolt	3/4" (19 mm) anti-friction
Fasteners	Included for surface mounting to recessed door prep and through bolting to trim
Electric options	**QEL** Quiet electric latch retraction **LX** Latch bolt monitor switch **SS7500-IN** Signal switch mortise lock
Dogging option	Hex key dogging
Strikes	575 - Dull black

QEL

Quiet electric latch retraction

- Bolt retraction via switch
- Converts exit door to push-pull operation

LX

Latch bolt monitor switch

- Signals use of an opening
- SPDT switch to monitor latch bolt

Standard trim

	EO **Exit only**	DT **Dummy trim** Pull when dogged	NL **Night latch** Key retracts latch bolt
Product description	9475EO 9575EO	9475DT 9575DT	9475NL 9575NL
Trim description	—	550DT	550DT x Cylinder
Escutcheon plate size	—	—	(40mm x 273mm x 21 mm)
Pull overall length	—	3 5/8" x 11 9/16" (93 mm / 294mm)	—
Pull center to center		10" (254 mm)	
Projection	—	2 5/8" x 1 7/8" (67 mm / 48mm)	2 5/8" x 1 7/8" (67 mm x 48mm)
ANSI function	01	02	03
Cylinder type	—	—	1 1/4" Mortise
Handing	—	—	—

	L **Lever** Key locks & unlocks	L-BE **Lever - blank escutcheon** Always operable (no cylinder)	L-DT **Lever dummy trim** Pull when dogged
Product description	9475L 9575L	9475L-BE 9575L-BE	9475L-DT 9575L-DT
Trim description	940L	940L-BE	940L-DT
Escutcheon plate size	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)
Pull center to center	—	—	—
Projection	2 3/32" (75 mm)	2 3/32" (75 mm)	2 3/32" (75 mm)
ANSI function	08	14	02
Cylinder type	1 1/4" Mortise	—	—
Handing	Handed/Reversible	Handed/Reversible	Handed/Reversible

Note: L-NL function can be setup during installation of the 940L trim.

9475/9575-F INPACT mortise lock fire exit device

575 strike

94/95 INPACT mortise lock fire exit device for use on factory prepped steel doors, not available for wood doors. The INPACT device is UL listed for panic and fire, ANSI/BHMA 156.3 Grade 1. The INPACT device is non-handed.

Finishes – 605, 606, 612, 625, 626, 626AM, 628, 710, 711

Specifications

Device functions	Device ships EO, DT, TL, L Blank escutcheon (BE) available
Device lengths	2'6" up to 2'9" for 24 5/32" device 2'10" up to 4' for 30 5/32" device
Device centerline	39 5/8" (1006mm)
Mortise lock centerline from finished floor	48 1/8" (1222 mm)
Projection	1 5/8" (41 mm) neutral 1 1/4" (32 mm) depressed
Latch bolt	3/4" (19 mm) anti-friction, field reversible
Fasteners	Included for surface mounting to recessed door prep and through bolting to trim
Electric options	**QEL** Quiet electric latch retraction **LX** Latch bolt monitor switch **SS7500-IN** Signal switch mortise lock
Dogging option	No mechanical dogging
Strikes	575 - Dull black

QEL

Quiet electric latch retraction

- Bolt retraction via switch
- Converts exit door to push-pull operation

LX

Latch bolt monitor switch

- Signals use of an opening
- SPDT switch to monitor latch bolt

Standard trim

	EO **Exit only**	NL **Night latch** Key retracts latch bolt
Product description	9475EO -F 9575EO-F	9475NL-F 9575NL-F
Trim description	—	550DT x Cylinder
Escutcheon plate size	—	(40mm x 273mm x 21 mm)
Pull overall length	—	—
Pull center to center	—	
Projection	—	2 5/8" x 1 7/8" (67 mm x 48mm)
ANSI function	01	03
Cylinder type	—	1 1/4" Mortise
Handing		—

	L **Lever** Key locks & unlocks	L-BE **Lever - blank escutcheon** Always operable (no cylinder)
Product description	9475L-F 9575L-F	9475L-BE-F 9575L-BE-F
Trim description	940L	940L-BE
Escutcheon plate size	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)	8" x 2 1/4" x 1 1/8" (203 x 57 x 29 mm)
Pull center to center	—	—
Projection	2 3/32" (75 mm)	2 3/32" (75 mm)
ANSI function	08	14
Cylinder type	1 1/4" Mortise	—
Handing	Handed/Reversible	Handed/Reversible

Note: L-NL function can be setup during the installation of the 940L trim.

INPACT™ device options and accessories

QEL – Quiet electric latch retraction

The QEL feature allows for the remote unlatching of exit devices. A control station operator can flip a switch to retract the latch bolt and immediately change an exit door to push-pull operation. Different than the popular EL, the QEL quiet operation is achieved using an electric drive motor which retracts the latch bolt either momentary unlatching or for extended periods of time. This feature is an alternative to manual dogging.

QEL devices are also useful with automatic door operators, and may be applied to fire-rated applications when under the control of an automatic fire alarm system.

UL approved for Class II circuit applications.

The QEL option does not include the power transfer from door to frame, the power supply, or the control operator. Refer to EPT-2 power transfer and the PS902 or 914 power supply.

The PS902/914 with the 2RS, 4RL or 4R board is the minimum required. Other option boards available for other functions, see PS902/914 power supply for additional information.

The QEL has a low in rush current, so it can be used with standard Schlage power supplies. Calculate the peak current draw of all devices in the system to determine the required amperage of the supply.

QEL electrical load	
Voltage	24VDC
Current	1.0 A Inrush (0.5 sec.) / 0.14 A Holding

The 900-2RS option board designed to control two electric latch retraction devices and provide time delay between the firing of outputs is required. The power transfer is also sold separately.

Schlage PS902	Schlage PS904	Schlage PS906
up to 2 amps	up to 4 amps	up to 6 amps

To order, specify:
Standard — use prefix QEL, example QEL94L.
Special center case dogging — use prefix SD-QEL, example SD-QEL94L

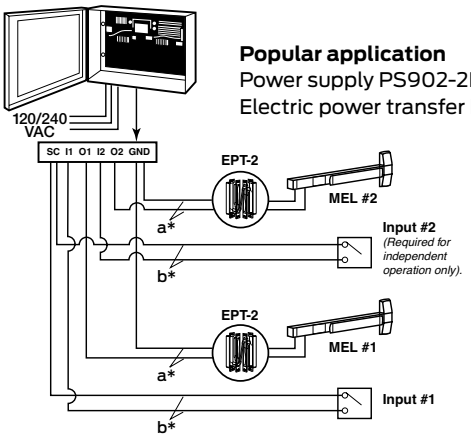

Popular application
Power supply PS902-2RS
Electric power transfer EPT-2 or EPT-10

a*

Distance (one-way)	Wire gauge
200´	18 AWG
320´	16 AWG
500´	14 AWG
800´	12 AWG

b*

Wire selection	Switch wire size
1200 ft. Max.	18 gauge standard

Latch bolt monitoring

The latch bolt monitor or (LX) feature gives an electronic signal when someone enters an opening from the trim side of the door. The device can then be connected to a security console or may be used as a single door alarm when used with a horn and power supply. The (LX) switch is located inside the device's pushpad on a concealed vertical rod device. For a mortise device, the switch is located inside the SS7500-IN mortise lock. Electrical ratings: 0.5 Amp., 24 VDC.

To order: Specify prefix LX.

INPACT accessories

Cylinders are not furnished with device or trim and must be specified when ordering. Mortise lock exit devices and the 940L use mortise-type cylinders.

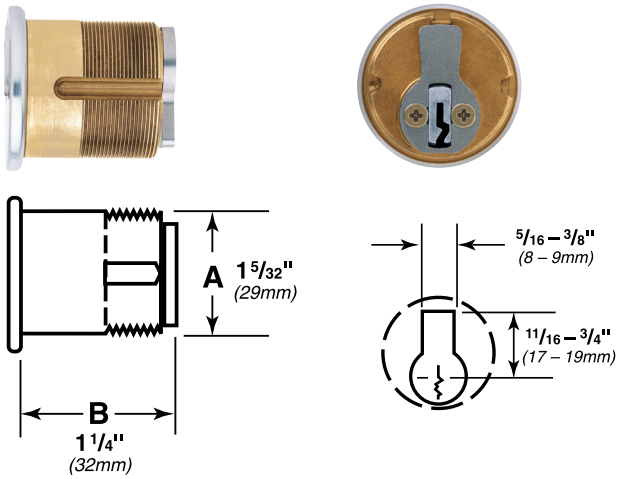

Less bottom rod, panic and fire rated (LBR)

LBR option is available on panic-rated devices by eliminating the bottom rod, latch and strike.

LBR option is available on fire rated devices using a spring loaded auxiliary latch bolt installed in the lower door edge.

When exposed to heat the auxiliary latch bolt releases, keeping the doors in alignment and closed during a fire. UL listed 3 hours on hollow metal doors double egress, 90 minute swinging same direction. See chart on page 20 for specific listings.

Fire rated LBR devices must be ordered in pairs or must be used in conjunction with an approved automatic or constant latching flush bolt.

The LBR option is not recommended for exterior door openings or where security is critical.

INPACT™ trim selection

Trim number and dimensions		**01** Exit only	**550DT**  **02** Pull when dogged	**550 DT x cylinder**  **03** Key retracts latch bolt	**940L**  **08** Key locks lever	**550DT x 376T** 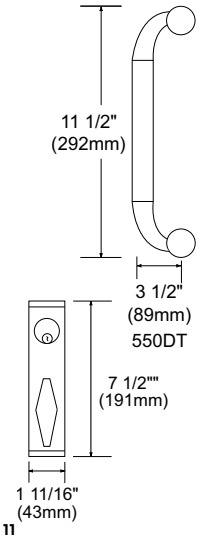 **11** Key locks thumbturn
Device/trim center line to finished floor						
Projection		—	2 5/8"	2 5/8"	3 1/8"	1 13/16" / 2 5/8"
Concealed vertical rod	Panic	9447EO 9547EO	9447DT 9547DT	— —	9447L 9547L	9447TL 9547TL
	Fire	9447EO-F 9547EO-F	— —	— —	9447L-F 9547L-F	9447TL-F 9547TL-F
	Ctr. line	39 5/8 (1006mm)	A 39 5/8 (1006mm) B 39 5/8 (1006mm)	— —	A 39 5/8 (1006mm) B 39 5/8 (1006mm)	A 39 5/8 (1006mm) B 53 1/2 (1359mm)
Mortise lock	Panic	9475EO 9575EO	9475DT 9575DT	9475NL 9575NL	9475L 9575L	— —
	Fire	9475EO-F 9575EO-F	— —	9475NL-F 9575NL-F	9475L-F 9575L-F	— —
	Ctr. Line	39 5/8 (1006mm)	A 39 5/8 (1006mm) B 39 5/8 (1006mm)	— —	A 39 5/8 (1006mm) B 39 5/8 (1006mm)	— —
Cylinder type required	Vert. rod device	—	—	—	Mortise*	Mortise*
	Mortise device	—	—	Mortise*	—	Mortise*

*See page 19 for cylinder information.

UL listings, fire exit hardware label/opening size

Exit device	Single door	Double door	
		Same direction**	Double egress
9475-F	3 Hour		
9575-F	4' x 10'		
9447-F		90 minute	3 hour
9547-F		8' x 10'	8' x 10'
9447LBR-F		90 minute	3 hour
9547LBR-F		8' x 9'	8' x 9'

Consult your door manufacturer for maximum listed door height.

Finishes

Finishes									
Color	**Bright brass**	**Satin brass**	**Satin bronze**	**Bright chrome**	**Satin chrome**	**Satin chrome**	**Aluminum, anodized**	**Duranodic dark bronze**	**Anodized black**
ANSI/BHMA number	605	606	612	625	626	626AM	628	710	711

*** Note**: Durable powder coated finishes available at specific special request. **Please contact factory.**

INPACT integrated door system

INPACT Recessed exit devices (94 and 95 Series)

INPACT door systems are designed to meet life safety and clear opening width requirements in cross corridor applications with factory installed Von Duprin 94 and 95 Series INPACT recessed exit devices. This Allegion all-in-one door solution uses L and T Series doors ordered from Steelcraft through pre-configured hardware system sets or choose the a-la-carte product option for a reliable assembly of industry-leading Allegion hardware options to meet the aesthetic and functional requirements of the opening.

Pre-configured application system sets

All hardware shown below is ordered from Steelcraft and ships with the INPACT door from Steelcraft. If required hardware is not provided in system sets, they may be ordered from Steelcraft as L or T Series doors prep only, with hardware ordered separately from Allegion brands for field installation.

	System set available												A la carte
	D1-D4= "Double Egress"				P1-P4 = "Same Swing"				S1-S4 = "Single"				
	D1 90x90	D2 90x90	D3 90x90	D4 90x180	P1 90x90	P2 90x90	P3 180x180	P4 180x180	S1 90x90	S2 90x90	S3 180x180	S4 180x180	From Steelcraft
Steelcraft doors													
L Series	■	■	■	■	■	■	■	■	■	■	■	■	■
T Series	■	■	■	■	■	■	■	■	■	■	■	■	■
Von Duprin exit devices													
94/9547 Series CVR with LBR option	■	■	■	■	■	■	■	■	–	–	–	–	■
94/9575 Series Mortise exit	–	–	–	–	–	–	–	–	■	■	■	■	■
LCN closers													
4040XP Closer	–	–	–	■	–	–	■	■	–	–	■	■	■
4000T Wall mounted closer	■	■	■	■	■	■	–	–	■	■	–	–	■
LCN magnetic holders													
SEM 7850 Magnetic holder	■	■	■	■	■	■	■	■	■	■	■	■	■
Ives hinges and pivots													
700 Stainless pin and barrel continuous	■	–	–	■	–	–	■	–	■	–	■	–	■
711BSC Beveled swing clear continuous	–	■	–	–	■	–	–	■	–	■	–	■	■
91105F pocket pivot	–	–	■	–	–	■	–	–	–	–	–	–	■
224HD AL geared continuous	–	–	–	–	–	–	–	–	–	–	–	–	■
224XY AL geared continuous	–	–	–	–	–	–	–	–	–	–	–	–	■
041XY AL geared swing clear continuous	–	–	–	–	–	–	–	–	–	–	–	–	■
040XY AL geared wide throw continuous	–	–	–	■	–	–	–	–	–	–	–	–	■
5BB1HW 4.5" or 5" butt hinges	–	–	–	–	–	–	–	–	–	–	–	–	■
5BB1HWBSC 4.5" or 5" butt hinges	–	–	–	–	–	–	–	–	–	–	–	–	■
*D4 is shown with 2 different hinges to accommodate a wide throw condition using an available aluminum geared 040XY. Typically hinges should be the same material.													
Steelcraft frames													
FE Series (special profile for swing clear or pocket pivot)	■	■	■	■	–	–	–	–	–	–	–	–	■
F Series (double or single rabbet)	–	–	–	–	■	■	■	■	■	■	■	■	■

Notes:

1. For system sets All hardware is installed or shipped with the door. Frame is ordered separately since frames are typically required earlier.
2. If ordering a la carte, changes to frames, hinges or closers may change your wall configuration, opening size and clear opening width.

Notes

Notes

About Allegion

At Allegion (NYSE: ALLE), we design and manufacture innovative security and access solutions that help keep people safe where they live, learn, work and connect. We're pioneering safety with our strong legacy of brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Our comprehensive portfolio of hardware, software and electronic solutions is sold around the world and spans residential and commercial locks, door closer and exit devices, steel doors and frames, access control and workforce productivity systems.

For more, visit **www.allegion.com**

KRYPTONITE ■ LCN ■ SCHLAGE ■ STEELCRAFT ■ VON DUPRIN

© 2026 Allegion
006592, Rev. 10/26
www.allegion.com/us

ALLEGION™