INSTALLATION INSTRUCTIONS

1. Remove end cap and dogging cover plate assembly.

2. For CD33/35 and CD75 devices:

- **A.** Remove mortise cylinder cam and reinstall in reverse (Figure 1).
- **B.** Insert key and rotate cam to install the cylinder to the cover plate (Figure 2).
- **C.** Remove key to slide cover plate in position in the mechanism case.

3. For SS33/35 devices:

- **A.** Leave mortise cylinder cam in standard position (do not reverse) (Figure 1).
- **B.** Install the cylinder to the cover plate (Figure 2).

4. Reassemble dogging cover plate and cylinder assembly into mechanism case.

5. Install end cap.

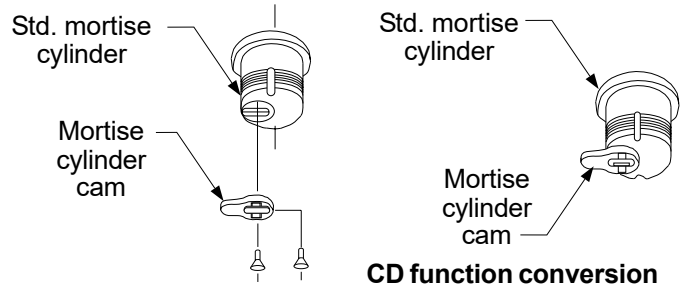

Figure 1

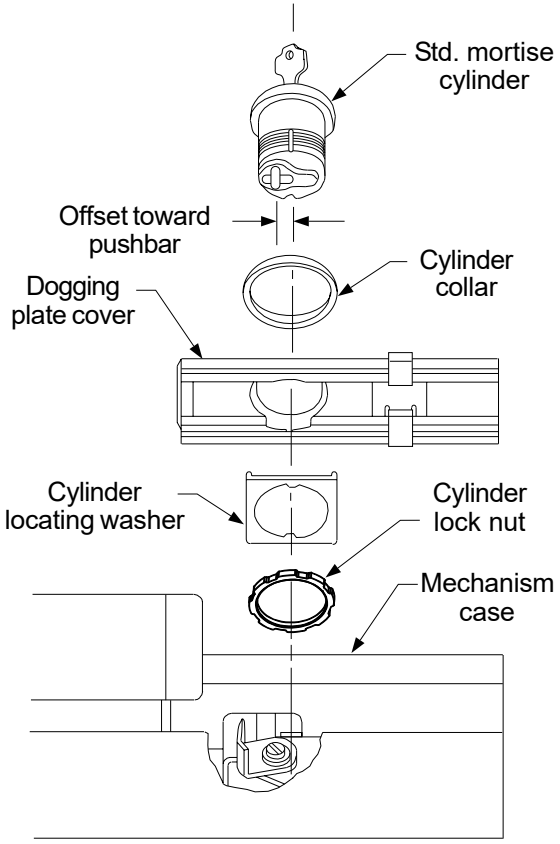

Figure 2

Customer Service
1-877-671-7011 www.allegion.com/us

ALLEGION

© Allegion 2024
Printed in U.S.A.
941905-00 Rev. 05/24-c

DESCRIPTION:

Installation of dogging cylinder in CD33/35, CD75, and SS33/35 devices

VON DUPRIN

DIRECTION NUMBER:	SHEET#:	DATE:
941905-00 (C)	**1 of 1**	**05-01-2024**